

PORTABLE ALUMINIUM FLAGPOLE **STANDARD**

Mobile flagpole made of anodized aluminum with performance parameters PN-EN 755-2, 6063T66 anti-corrosion protection Al/An 15 µm class 3. Sections made of narrowed tubes.

Flag exposure:
dependent on
gusts of wind


Flag installation:
rope,
snap hooks
(attached to a flag)

Raising and
lowering the flag:
using an external rope
attached to a cleat
located 1,5m
above the ground

PROFILE:
Sectional, portable
aluminium flagpole

ANODIZING:
15 micron

WALL THICKNESS:
2 mm

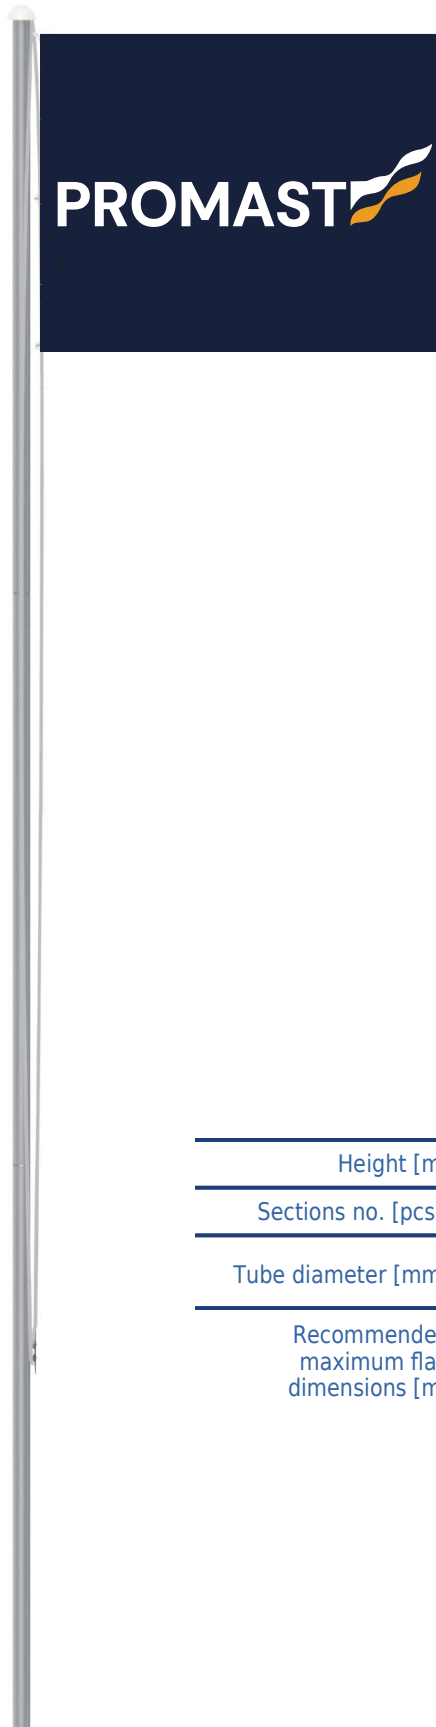

TOPS



Rotating socket
with a top



Silver onion
(aluminium)
(option)



Golden onion
(brass)
(option)

HALYARD SYSTEM



Rope



Cleat

Height [m]	3	4	5	6
Sections no. [pcs.]	3	4	5	6
Tube diameter [mm]	50	50	50	50
Recommended maximum flag dimensions [m]	1,2 x 2 [2,4 m ²]	1,2 x 2 [2,4 m ²]	1,2 x 2 [2,4 m ²]	1,2 x 2 [2,4 m ²]